


Ductility Testing Apparatus

ZI P-128

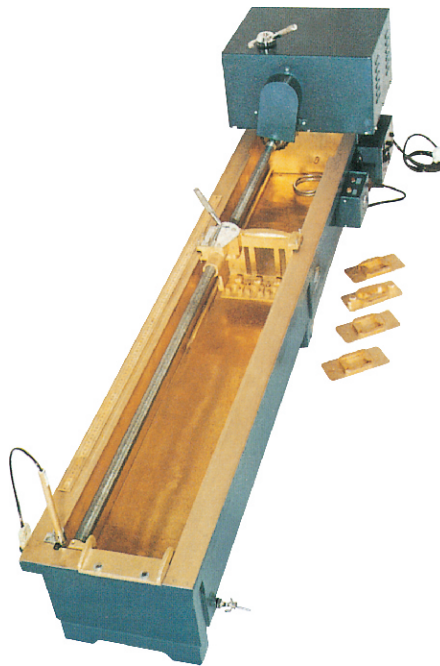

Ductility Testing Apparatus : ZI P-128

IS 1208-1058, ASTM D 113, IP32, 55, AASHTOT 51

Designed to test three specimens simultaneously. The machine consists of a carriage moving over a lead screw. An electric motor driven reduction gear unit ensures smooth constant speed and continuous operation. The entire assembly is mounted with a stainless steel lined water bath completely encased in metal bound hardwood. It is equipped with an electric pump circulator and heater. The temperature is controlled thermostatically. Two rates of travel i.e. 5 cm/min and 1 cm/min are provided. Suitable for operation on 230 V, 50 Hz, Single Phase, A.C. supply.

COMPLETE WITH:

ZI P-128-01 Ductility Mould , with Base Plate 3 Nos.

ZI P-128-02 Thermometer IP 38⁰C, Range: 23⁰ C to 27⁰ C

ZEAL INTERNATIONAL

1, Netaji Subhash Marg, Darya Ganj, New Delhi-110 002 INDIA
Ph.:+91-11-23276114, 23244474, 23277528, 23278846, Fax :+91-11-23273214, 43580558
E-mail : sales@zealinternational.com ,website : zealinternational.com