


Pocket Concrete Penetrometer

ZI 2006

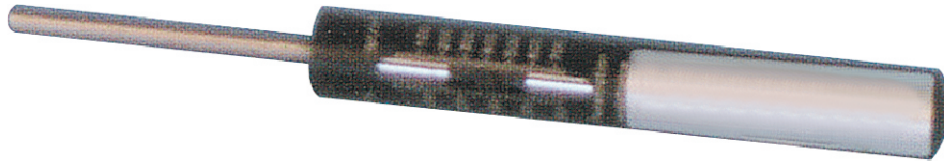

Pocket Concrete Penetrometer : ZI 2006

ASTM C-403

For fast evaluation of the initial setting of concrete. It can be used on light weight concrete, special roof deck mixes and concrete additives.

SPECIFICATION :

Consists of a needle having face area $3/10$ sq. cm. and graduated at a distance of 25cm. The needles point is an integral part of barrel which houses a calibrated spring. The spring is confined in a sleeve. The resistance offered by the concrete mortar is shown on the direct reading scale with a marker ring which holds its position when released. Scale range is 0-50 kg/cm² when the penetration resistance reaches a value of 35kg/cm² the concrete is assumed initially set. Supplied complete in carrying case.

ZEAL INTERNATIONAL

1, Netaji Subhash Marg, Darya Ganj, New Delhi-110 002 INDIA
Ph.:+91-11-23276114, 23244474, 23277528, 23278846, Fax :+91-11-23273214, 43580558
E-mail : sales@zealinternational.com ,website : zealinternational.com