


Saybolt Viscometer

ZI P-116

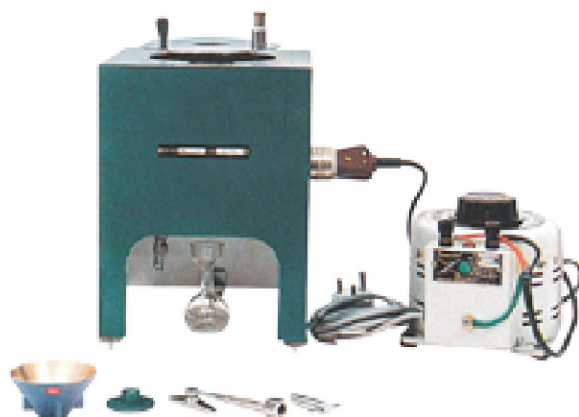

Saybolt Viscometer : ZI P-116

ASTMD 88, D 244, AASHTOT 72

Saybot Viscometer, Electrically Heated, ASTM D 88, D244, AASHTO T 72 for the empirical measurement of Saybolt

Viscosity of petroleum products at specified temperature between 70°F and 210°F. This is also used for determining the Saybolt Furol viscosity of bituminous materials at temperature of 250, 275, 300, 350, 400 and 450°F. It comprises one each Cylindrical Oil Cup, Universal Tip, Furol Tip, Bath Fitted with immersion heater mounted on a stand. Dimmerstat for temperature control, Stirrer with shield. Complete with insulated handle and thermometer support, receiving flask, withdrawl tube, filter funnel, thermometer support for cup and circular spirit level. Suitable for operation on 220 V. 50 Hz, Single Phase.AC Supply.

Extras

ZIP 11601

Brass oil tube

ZIP 11602

Receiving Flask, 60ml

ZIP 11603

Universal and flurol tup (set of 2)

ZIP 11604

Filter Funnel

ZIP 11605

Thermometer Support

ZIP 11606

Heating Coil

ZIP 11607

ASTM Thermometer Type 17F, Range : 66°F to 80°F

ZIP 11608

ASTM Thermometer Type 18F, Range : 94°F to 80°F

ZIP 11609

ASTM Thermometer Type 19F, Range : 120°F to 134°F

ZIP 11610

ASTM Thermometer Type 20F, Range : 134°F to 148°F

ZIP 11611

ASTM Thermometer Type 21F, Range : 174°F to 188°F

ZIP 11612

ASTM Thermometer Type 22F, Range : 204°F to 218°F

ZIP 11613

ASTM Thermometer Type 77F, Range : 245°F to 265°F

ZIP 11614

ASTM Thermometer Type 78F, Range : 295°F to 315°F

ZIP 11615

ASTM Thermometer Type 79F, Range : 345°F to 365°F

ZIP 11616

ASTM Thermometer Type 80F, Range : 395°F to 415°F

ZIP 11617

ASTM Thermometer Type 81F, Range : 445°F to 4650°F

ZEAL INTERNATIONAL

1, Netaji Subhash Marg, Darya Ganj, New Delhi-110 002 INDIA
Ph.:+91-11-23276114, 23244474, 23277528, 23278846, Fax :+91-11-23273214, 43580558
E-mail : sales@zealinternational.com ,website : zealinternational.com