


Triaxial Shear Apparatus (Motorised) Single Speed

ZI 3061

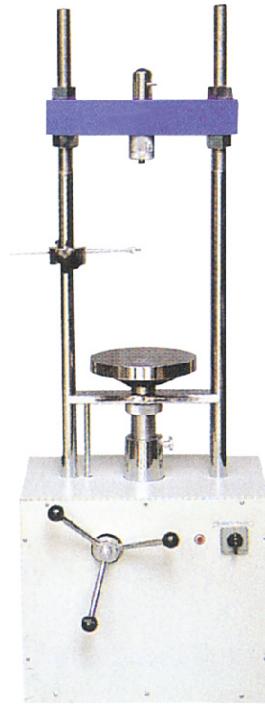

Triaxial Shear Apparatus (Motorised) Single Speed : ZI 3061

SPECIFICATION :

For determining the triaxial shear strength of soil specimens of 38mm, 50mm, 75mm and 100mm dia.

CONSISTS OF :

One load frame 5000 Kgf motorised , consists one rate of strain type, giving the following rates of strain. 1.25mm/min . Load frame is supplied with a dial gauge bracket. Universal triaxial cell (stationary bushing) 10kg/cm.sq.

One lateral pressure assembly 0-10 kg/cm.sq.

One lateral pressure assembly 0-10kg/cm.sq. complete with foot pump and rubber hose.

One high sensitivity proving ring capacity 1000kg.

One strain dial gauge 0.01 x 25mm.

Suitable for operation on 230 V A.C.

ZEAL INTERNATIONAL

1, Netaji Subhash Marg, Darya Ganj, New Delhi-110 002 INDIA
Ph.:+91-11-23276114, 23244474, 23277528, 23278846, Fax :+91-11-23273214, 43580558
E-mail : sales@zealinternational.com ,website : zealinternational.com